

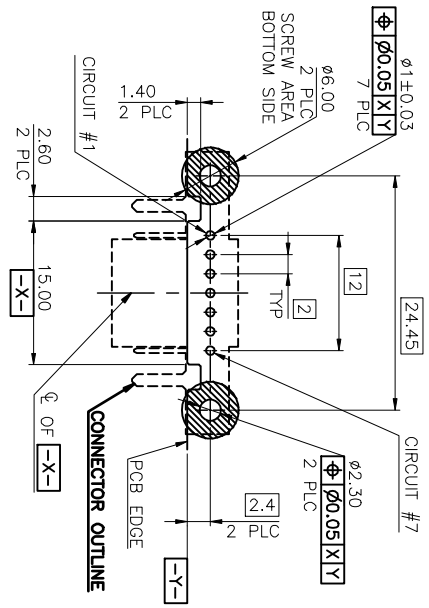
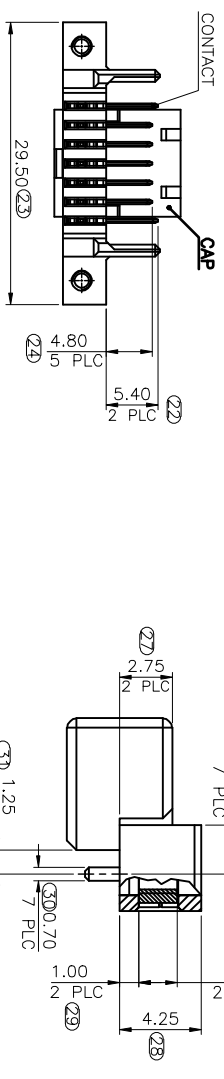



- NOTE:
- MATERIAL:
HOUSING: LCP WITH 30% GF, UL 94V-0, BLACK COLOR.
CAP: LCP WITH 30% GF, UL 94V-0, BLACK COLOR.
CONTACTS: BRASS.
NUTS: BRASS.
 - FINISH:
CONTACTS: GOLD FLASH OVER 1.27μm [50μ"] MIN. NICKEL ON ENTIRE CONTACT.
NUTS: 1.27μm [50μ"] MIN. NICKEL PLATED.
 - REFLOW SOLDER CAPABLE TO 260°C PER TE TEST SPEC. 109-201, CONDITION B.
 - SCREWLOCK TORQUE LIMIT: 1.7 kgf-cm MAX. TIGHTENING.

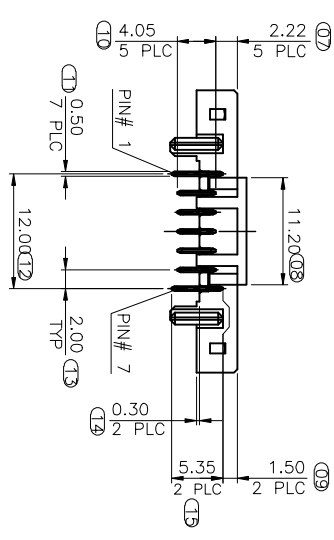

TOLERANCE: ±0.05, THICKNESS: 1.2mm
RECOMMENDED PCB LAYOUT
(TOP VIEW)

LCP+30% G.F	02-0002-03
HTN+30% G.F	RA1194507GB0G0R0
NY9T+30% G.F	RA1594507GB0G0R0
CAP&HOUSING MATERIAL	02-0002-01
PART NUMBER(OLD)	PART NUMBER

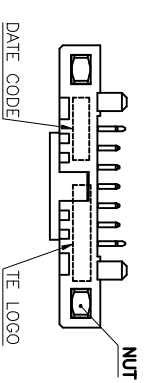

8 7 6 5 4 3 2 1

REV	DESCRIPTION	DATE	DMN	APVD
A	RELEASED	16Sep2009	MD	JY

<p>Zhongxiang Electron Science CO.,LTD</p> <p>2.0 MM PITCH BATTERY CONNECTOR, 7 POSITION, 4.25 H. PLUG, RIGHT ANGLE, DIP.</p>		<p>NAME</p> <p>2.0 MM PITCH BATTERY CONNECTOR, 7 POSITION, 4.25 H. PLUG, RIGHT ANGLE, DIP.</p>
<p>DMN</p> <p>16Sep2009</p>	<p>CHK</p> <p>Michael Dong</p>	<p>16Sep2009</p>
<p>APVD</p> <p>Govin Chen</p>	<p>16Sep2009</p>	
<p>PRODUCT SPEC</p> <p>JS-CC03348-A1</p>	<p>APPLICATION SPEC</p> <p>BATTERY_01-1(A)</p>	
<p>FINISH</p> <p>SEE NOTE</p>	<p>WEIGHT</p> <p>2.05 GRAMS</p>	<p>SIZE</p> <p>C-02-0002</p>
<p>PROJECTION</p> <p>SEE NOTE</p>	<p>DIMENSIONS</p> <p>MM</p>	<p>CUSTOMER DRAWING</p> <p>SCALE</p> <p>SHEET 1 of 1</p> <p>REV A</p>
<p>TOLERANCES UNLESS OTHERWISE SPECIFIED:</p> <p>0 PLC ±</p> <p>1 PLC ±0.3</p> <p>2 PLC ±0.2</p> <p>3 PLC ±0.15</p> <p>4 PLC ±</p> <p>ANGLES ±3°</p>	<p>MATERIAL</p> <p>SEE NOTE</p>	<p>RESTRICTED TO</p>