

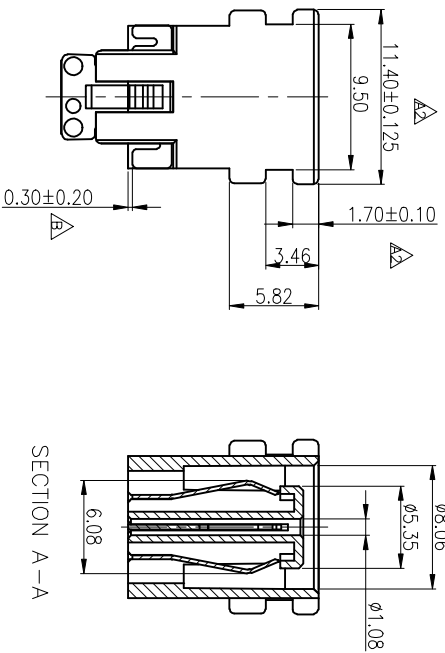


REV.	DESCRIPTION	DATE	DMN	APVD
A	RELEASED	15MAY09	MD	DZ
A2		10Sep09	MD	JY
B		19AUG13	XU	DZ

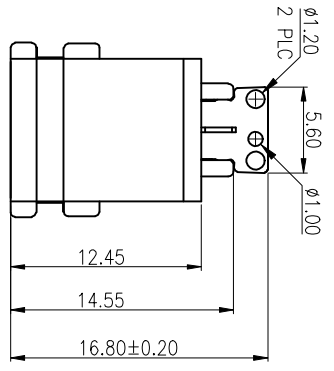

NOTE:
 1. MATERIAL:
 HOUSING: PA9T UL94 V-0, COLOR: (SEE TABLE).
 CONTACT 1: PHOSPHOR BRONZE C5191-4H, T=0.30mm.
 CONTACT 2: PHOSPHOR BRONZE C5191-4H, T=0.30mm.
 CONTACT 3: BRASS, C2680-4H, T=0.25mm.
 CONTACT 4: PHOSPHOR BRONZE C5191-4H, T=0.30mm.
 2. FINISH:
 CONTACT: 0.0203um [0.8μ"] GOLD PLATED ON CONTACT AREA,
 2.54um [100μ"] MIN. BRIGH-TIN ON SOLDER TAIL,
 WITH ENTIRE CONTACT UNDERPLATED 1.27um [50μ"] MIN.
 NICKEL.

3. ELECTRICAL:
 CONTACT RESISTANCE: 30 mΩ MAX.
 INSULATOR RESISTANCE: 1000 MΩ MIN.
 CURRENT RATING: 9 A MAX.
 DIELECTRIC WITHSTANDING VOLTAGE: 250V AC/DC MAX
 4. ENVIRONMENTAL:
 OPERATING TEMPERATURE: -25° TO +85°C

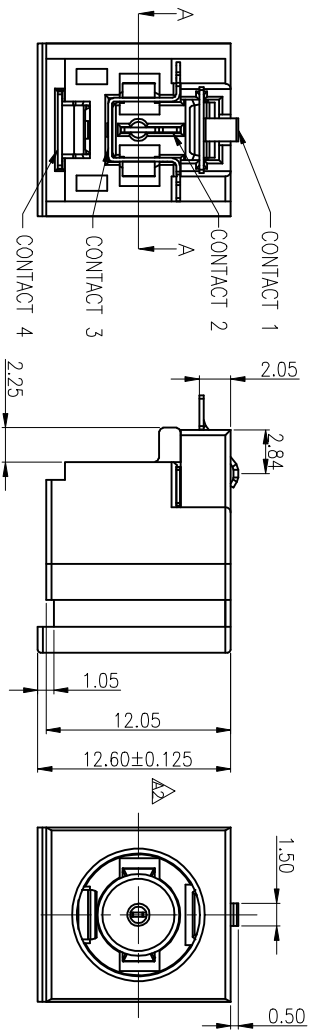

COMMON CARTON	BLACK	MC0513404HB0C050	06-0003-03
TYCO CARTON	YELLOW(108C)	MC0513404HY1C050	06-0003-02
COMMON CARTON	YELLOW(108C)	MC0513404HY1C050	06-0003-01
PACKING	COLOR	OLD PART NO.	NEW PART NO.

TOLERANCES UNLESS OTHERWISE SPECIFIED:		MM
0 PLG	±	0.1
1 PLG	±	0.3
2 PLG	±	0.2
3 PLG	±	0.15
ANGLES	±	3°
MATERIAL SEE NOTE		
FINISH SEE NOTE		
PROJECTION SEE NOTE		
APPLICATION SPEC		JS-GC03118-A1
DC JACK-01-01		
NAME		Zhongxiang Electron Science Co.,LTD
DRAWING NO		DC JACK
CUSTOMER DRAWING		C-06-0003

SIZE	DRAWING NO	RESTRICTED TO
A3	C-06-0003	
DIMENSIONS:		
MM		
WEIGHT		
DC JACK-01-01		
PRODUCT SPEC		JS-GC03118-A1
APPLICATION SPEC		DC JACK-01-01
FINISH SEE NOTE		
PROJECTION SEE NOTE		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		
MATERIAL SEE NOTE		
FINISH SEE NOTE		
PROJECTION SEE NOTE		
APPLICATION SPEC		JS-GC03118-A1
DC JACK-01-01		
NAME		Zhongxiang Electron Science Co.,LTD
DRAWING NO		DC JACK
CUSTOMER DRAWING		C-06-0003

8 7 6 5 4 3 2 1