


Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C
 Materials
 Contact Material: Phosphor Bronze
 Insulation Material: Polyester, UL 94V-0
 Nylon 6t
 All materials must be GP materials

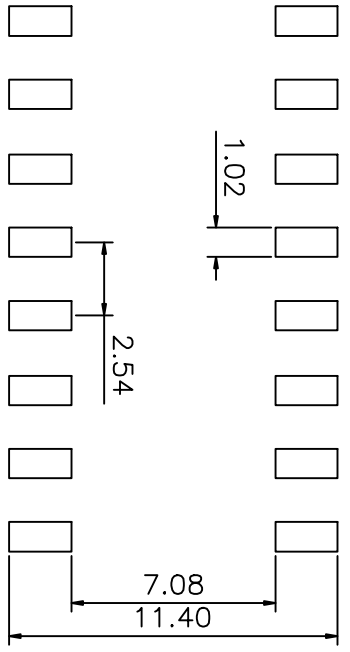

Recommended P.C.Board Layout

A2	2013.12.10	ADD PART NUMBER	CXW	D.Z
A1	2011.11.04	ADD PART NUMBER	PH	WZ
A	2011.8.11	RELEASED	YU	WZ
ECON(DCN) NO.	REV.	DATE	DESCRIPTION	CHANGE
				APVD

TOLERANCES UNLESS OTHERWISE SPECIFIED
X: ±0.30
XX: ±0.25
XXX: ±0.10
X*: ±2*
X.X*: ±1*

PIN NUMBER	PACKING	MIN. GOLD THICKNESS	PART NUMBER
1*10	REEL	[6/F]	27-0003-03
1*8	REEL	[6/F]	27-0003-02
1*8	TUBE	[6/F]	27-0003-01

JS HAOGUO(Zhongxiang) Limited Company

Customers Drawing	TITLE: 2.54 PITCH FEMALE HEADER
Part No.	SEE TABLE
Drawing No.	C-27-0003
UNIT	mm
SIZE	A4
Scale	1:1
Sheet	1 of 1
Third Angle Projection	