

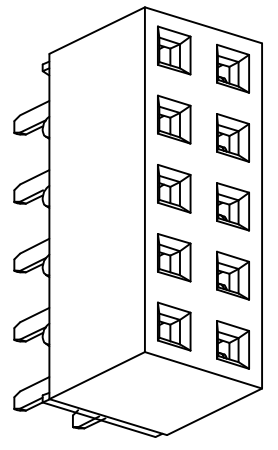
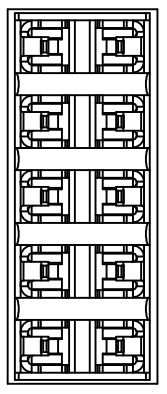
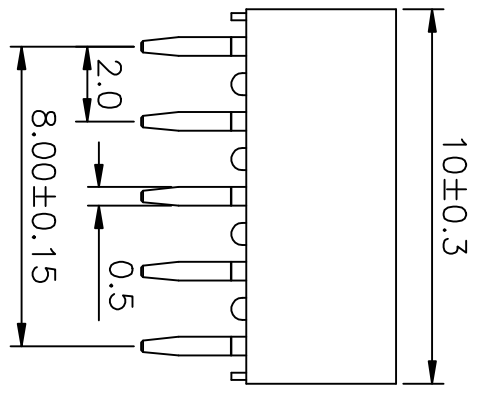
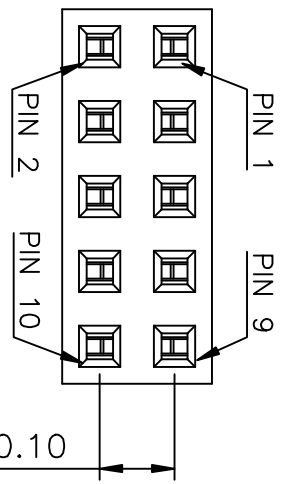


ROHS
2002/95/EC

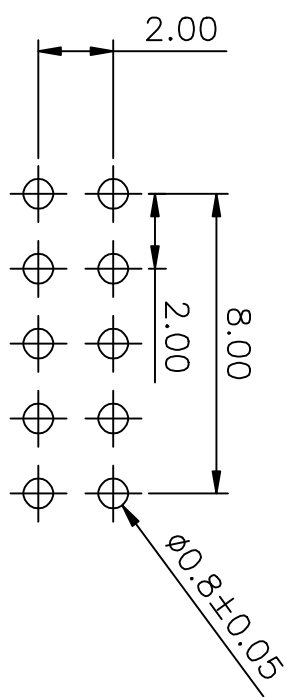

3D
VIEW

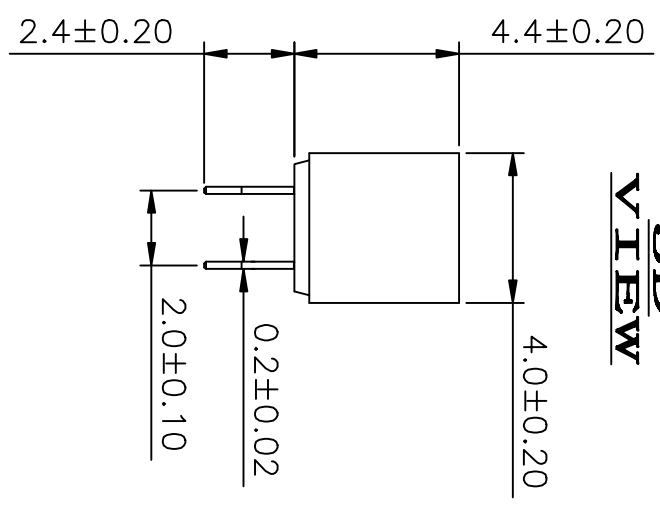

P.C.B. LAYOUT

- NOTE:
- MATERIAL
- CONTACT: PHOSPHOR BRONZE
 - INSULATOR: NY9T, (UL94V-0),BLACK.
 - CONTACT PLATING: GOLD FLASH
- SPECIFICATION
- CONTACT RESISTANCE: 30m ohms Max
 - INSULATOR RESISTANCE: 1000M ohms Min
 - CURRENT RATING: 1 Amp
 - DIELECTRIC WITHSTANDING VOLTAGE: AC 500V
 - OPERATING TEMPERATURE: -40°C TO +105°C

ECN(DCN) NO.	REV.	DATE	DESCRIPTION	CHANGE	APVD
	A	2013/03/14	NEW	XU	D.Z

TOLERANCES UNLESS OTHERWISE SPECIFIED	X: ±0.30	X*: ±2"
	XX: ±0.25	XX*: ±1"
	.XXX: ±0.10	

Customers Drawing	Part No.	TITLE:
HAOYONG_XU	CITYONG_JIANG	HAOYONG_XU (Zhongxiang) Limited Company

MIN. GOLD THICKNESS	27-0009-01-H
PART NUMBER	

ECN(DCN) NO.	REV.	DATE	DESCRIPTION	CHANGE	APVD	UNIT	mm	SIZE	A4	Third Angle Projection
	A	2013/03/14	NEW	XU	D.Z			C-27-0009		Sheet 1 of 1