


REV.	DESCRIPTION	DATE	DMN	APVD
A	RELEASED	10SEP2012	YJ	WEI

1. MATERIAL
 - 1.1 INSULATOR:POM/ABS.
 - 1.2 BNC BODY:ZINC.
 - 1.3 SHELL:SPCC.
 - 1.4 PIN:BRASS.
 - 1.5 WASHER:SPCC.
 - 1.6 NUT:ZINC.
2. FINISH
 - 2.1 PIN :G/F PLATED.
 - 2.2 SHELL:NI PLATED.
 - 2.3 WASHER AND NUT: NI PLATED.
- 3.ELECTRICAL CHARACTERISTICS
 - 3.1 WORKING VOLTAGE: AC 250V.
 - 3.2 WITHSTAND VOLTAGE:500V,50Hz,rms.
 - 3.3 INSULATION RESISTANCE: 500M OHM. MIN.
 - 3.4 CONTACT RESISTANCE: CENTER CONTACT:20m ohm MAX. OUTER CONTACT:30m ohm MAX.
- 4.ENVIRONMENTAL
 - 4.1 WORKING TEMPERATURE: -25°C~+105°C.
 - 4.2 RELATIVE HUMIDITY:MAX 90%(40°C±2°C).

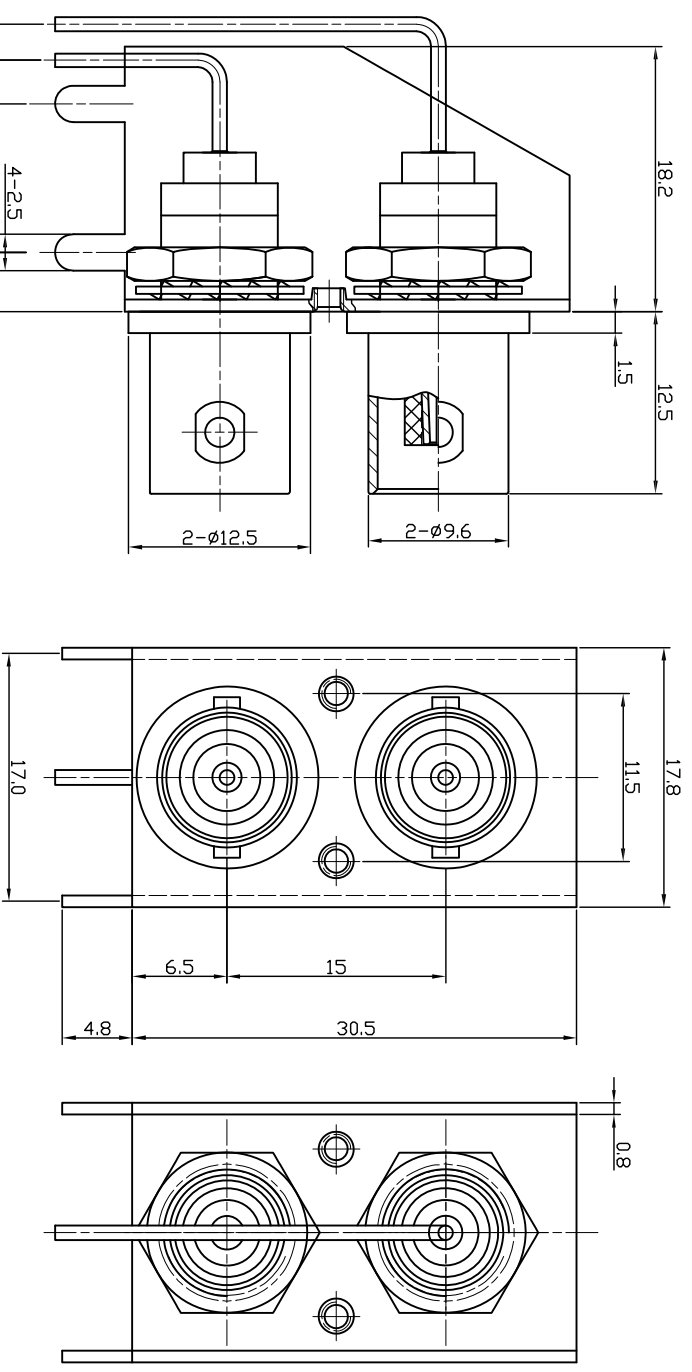

J99-0048-01
PART NUMBER

ZhongXiang Electron Science CO.,LTD

BNC DOUBLE RA DIP CONN

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DMN	YJ
0 PLG	± -	10SEP2012	
1 PLG	± 0.3	CHK	
2 PLG	± 0.2	WEI	
3 PLG	± 0.15	APVD	
4 PLG	± - ± 3'	PRODUCT SPEC	
MATERIAL		APPLICATION SPEC	
SEE NOTE		FINISH	
SEE NOTE		PROJECTION	
SEE NOTE		DIMENSIONS:	
SEE NOTE		MM	
SEE NOTE		CUSTOMER DRAWING	
SEE NOTE		SCALE	
SEE NOTE		SHEET	
SEE NOTE		1 OF 1	
SEE NOTE		REV	
SEE NOTE		A	
SEE NOTE		RESTRICTED TO	
SEE NOTE		A	

8 7 6 5 4 3 2 1