

REV	DESCRIPTION	DATE	DWN	AP/D
A	RELEASED	19June09	MD	DZ
D4		13Apr12	XX	WZ
D5		16May14	XU	DZ

NOTES:
 1. MATERIALS HOUSING: (SEE TABLE), FIRE RATING:(SEE TABLE), COLOR: (SEE TABLE).
 CONTACTS: BRASS

2.FINISH: CONTACTS: 2.54 μ m [100 μ] MIN. (SEE TABLE) OVER 1.27 μ m [50 μ]
 MIN NICKEL ON ENTIRE CONTACT.

3.ELECTRICAL: CONTACT RESISTANCE: 30 m Ω MAX. INSULATION RESISTANCE: 500 M Ω MIN. DIELECTRIC WITHSTANDING: 1500V AC. CURRENT RATING: 10 A
 4.ENVIRONMENTAL: OPERATING TEMPERATURE: -40° TO +105°C.

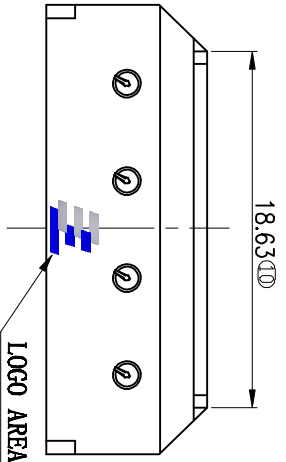
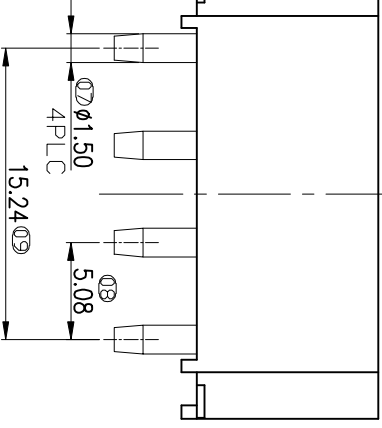
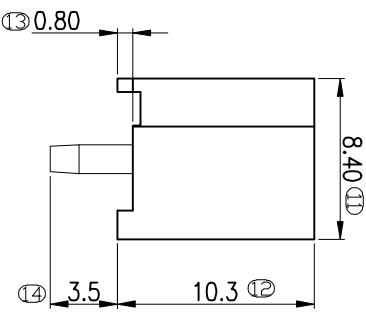
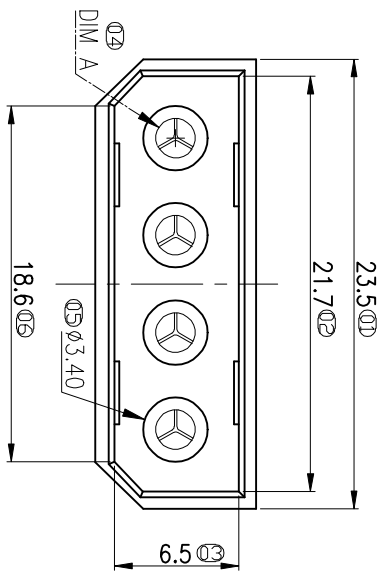
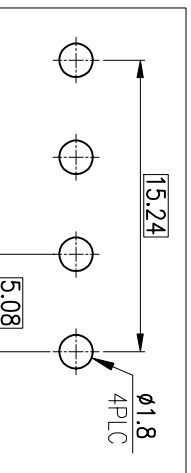


TABLE:

UL94V-2	UL94V-0	UL94V-2	UL94V-0	UL94V-2	UL94V-0	UL94V-2	UL94V-0	UL94V-2	UL94V-0
WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL
WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL
WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL
WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL	WITH TYPICAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DIM		NAME	
0 PLG	± 0.3	13Apr2012	XIAOXU LIU	Zhongxiang Electron Science CO.,LTD	
1 PLG	± 0.2	13Apr2012	CITONG JIANG	POWER CONNECTOR, 4 POSITION	
2 PLG	± 0.15	13Apr2012	WEI ZHANG	PLUG, VERTICAL, DIP.	
3 PLG	± 0.15				
4 PLG	± 0.15				
ANGLES	± 3°				
MATERIAL	SEE NOTE	APPLICATION SPEC	US-GC03138-A1		
FINISH	SEE NOTE				
PROJECTION	SEE NOTE				

PROJECTION	WEIGHT	DIMENSIONS:	MM	SIZE	DRAWING NO	SCALE	SHEET	1 OF 1	REV	D5
				A3	C-12-0001					

8 7 6 5 4 3 2 1