




REV.	DESCRIPTION	DATE	DWN	APVD
A	RELEASED	28AUG09	A.X	J.Y

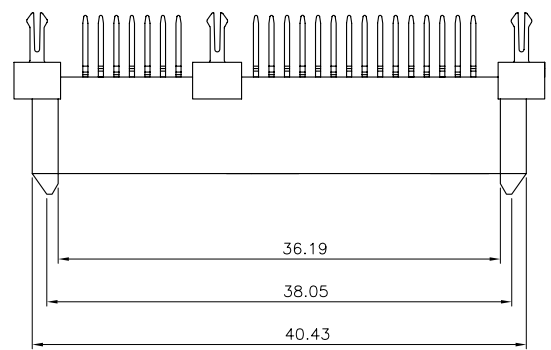




NOTE:
 PRODUCTS MUST CONFORM TO JS SPEC JS-GC03143-A1.

1. MATERIAL:
 HOUSING: LCP UL 94V-0, COLOR: BLACK.
 CONTACTS: PHOSPHOR BRONZE. T=0.25mm
 BOARDLOCKS: BRASS. T=0.30mm



2. FINISH:
 CONTACTS: 0.381um [15μ"] MIN. GOLD PLATING ON CONTACT AREA,
 2.54um [100μ"] MIN. MATTE-TIN PLATING ON SOLDER TAIL,
 WITH ENTIRE CONTACT UNDERPLATED 50μ" MIN. NICKEL.
 BOARDLOCKS: 2.54um [100μ"] MIN. MATTE-TIN OVER
 1.27um [50μ"] MIN. NICKEL PLATED.

3.ELECTRICAL:
 CONTACT RESISTANCE: 45 mΩ MAX.
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
 CURRENT RATING: 1.5A
 VOLTAGE RATING: 12V AC

4.ENVIRONMENTAL:
 OPERATING TEMPERATURE: -25°C TO +85°C

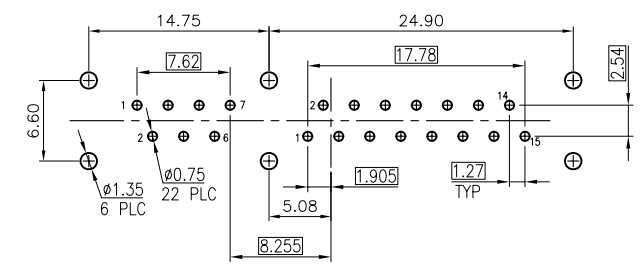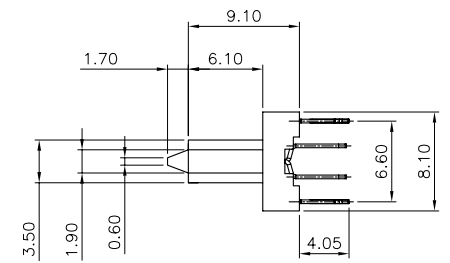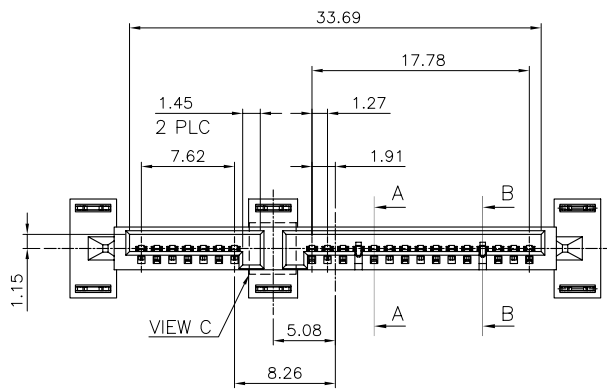

RECOMMEND P.C.B LAYOUT
 PCB TOLERANCE:±0.05

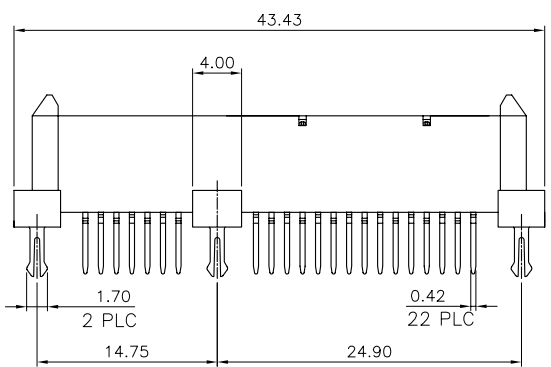

SH2712622FB0H0S0	09-0019-01
OLD PART NUMBER	NEW PART NUMBER

TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.2 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°	DWN ANDY_XIAO 28AUG2009	Zhongxiang Electron Science CO.,LTD	
	CHK GAVIN_CHEN 28AUG2009		
MATERIAL SEE NOTE	APVD JACKY_YANG 28AUG2009	SATA 22P, DIP VERTICAL TYPE,H=10.80mm.	
FINISH SEE NOTE	APPLICATION SPEC	SIZE A3	DRAWING NO C-09-0019
PROJECTION	WEIGHT	RESTRICTED TO	
	DIMENSIONS: MM	CUSTOMER DRAWING	SCALE - SHEET 1 of 1 REV A