


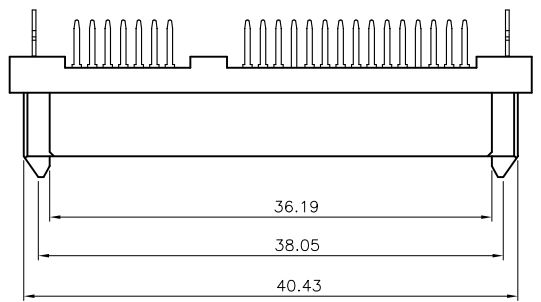
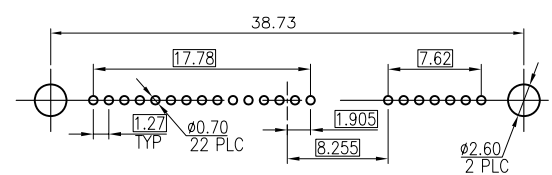


REV.	DESCRIPTION	DATE	DWN	APVD
A	RELEASED	28AUG09	A.X	J.Y
A2		27JUL10	Y.J	D.Z



NOTE:
 PRODUCTS MUST CONFORM TO JS SPEC JS-GC03143-A1.
 1. MATERIAL:
 HOUSING: LCP UL 94V-0, COLOR: BLACK .
 CONTACTS: PHOSPHOR BRONZE, T=0.25mm.
 BOARDLOCKS: BRASS, T=0.30mm.
 2. FINISH:
 CONTACTS: GOLD (SEE TABLE) PLATED ON CONTACT AREA,
 2.54um [100μ"] MIN. MATTE-TIN ON SOLDER TAIL, WITH ENTIRE CONTACT
 UNDERPLATED 1.27um [50μ"] MIN. NICKEL.
 BOARDLOCKS: 2.54um [100μ"] MIN. MATTE-TIN OVER 1.27um [50μ"] MIN. NICKEL ON ENTIRE BOARDLOCK.
 3.ELECTRICAL:
 CONTACT RESISTANCE: 45 mΩ MAX.
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
 CURRENT RATING: 1.5A
 VOLTAGE RATING: 12V AC
 4.ENVIRONMENTAL:
 OPERATING TEMPERATURE: -25°C TO +85°C




SECTION B-B
 1:1

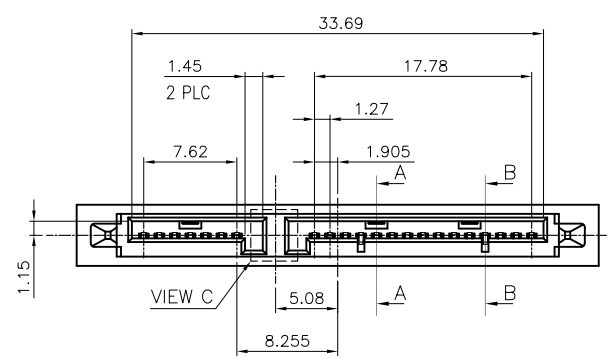

RECOMMEND P.C.B LAYOUT (T=1.6mm)
 PCB TOLERANCE:±0.05

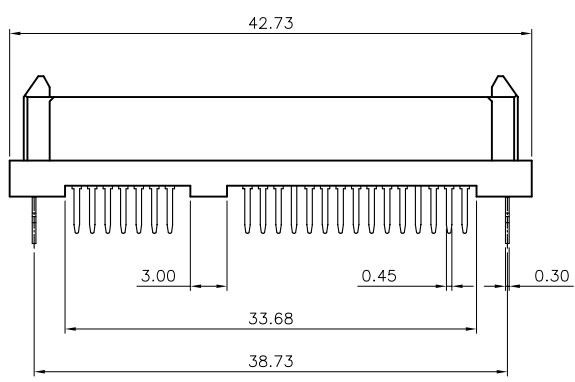

VIEW C
 SCALE 2:1



SECTION A-A
 1:1

NO	G/F	—	09-0026-06
	15μ"	SB9718822FB000S2	09-0026-04
	5μ"	SB9718822FB0J0S2	09-0026-03
YES	G/F	—	09-0026-05
	15μ"	SB3718822FB0H0S2	09-0026-02
	5μ"	SB3718822FB0J0S2	09-0026-01
GROUND PIN	GOLD THICKNES	OLD PART NUMBER	NEW PART NUMBER

TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN	21Oct2009
0 PLC ± -	ANDY_XIAO	
1 PLC ± 0.3	CHK	21Oct2009
2 PLC ± 0.2	GAVIN_CHEN	
3 PLC ± 0.15	APVD	21Oct2009
4 PLC ± -	JACKY_YANG	
ANGLES ± 3°	PRODUCT SPEC	
MATERIAL	—	
SEE NOTE	APPLICATION SPEC	
FINISH	—	
SEE NOTE	WEIGHT	
PROJECTION	DIMENSIONS:	MM

Zhongxiang Electron Science CO.,LTD

NAME: SAT A 7+15P, VERTICAL DIP, FEMALE.

SIZE	DRAWING NO	RESTRICTED TO
A3	C-09-0026	—
CUSTOMER DRAWING	SCALE	SHEET 1 of 1
—	—	REV A2