

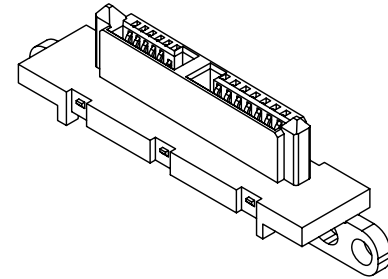
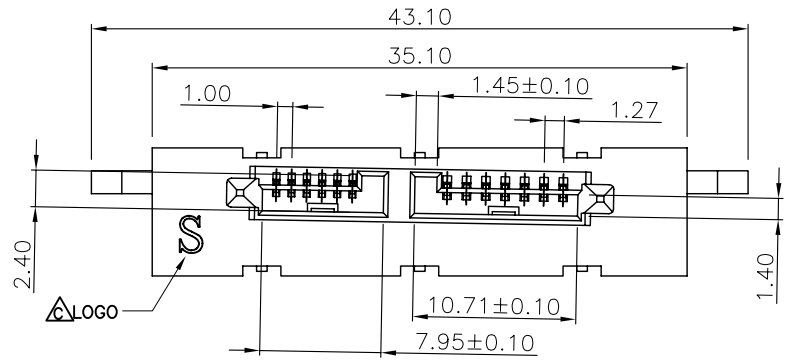
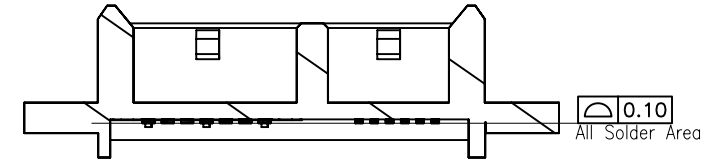



REV.	DESCRIPTION	DATE	DWN	APVD
C	△ ECN-12102301	25Oct2012	Lee	WZ
C1	△	20NOV2012	Lee	WZ



NOTE:
 1. MATERIAL:
 HOUSING: LCP UL 94V-0, COLOR: BLACK .
 CONTACTS: PHOSPHOR BRONZE .
 SERIES PIECE:BRASS .
 2. FINISH:
 CONTACTS: GOLD (SEE TABLE) PLATED ON CONTACT AREA,
 2.54um [100μ"] MIN. MATTE-TIN ON SOLDER TAIL, WITH ENTIRE CONTACT
 UNDERPLATED 1.27um [50μ"]MIN. NICKEL.
 SERIES PIECE: 2.54um [100μ"] MIN. MATTE-TIN PLATING ON SOLDER
 TAIL, 1.27um [50μ"] MIN. NICKEL UNDERPLATING OVERALL.
 3.ELECTRICAL:
 CONTACT RESISTANCE: 45 mΩ MAX.
 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
 CURRENT RATING: 1.5A
 VOLAGE RATING: 12V AC
 4.ENVIRONMENTAL:
 OPERATING TEMPERATURE: -25°C TO +85°C

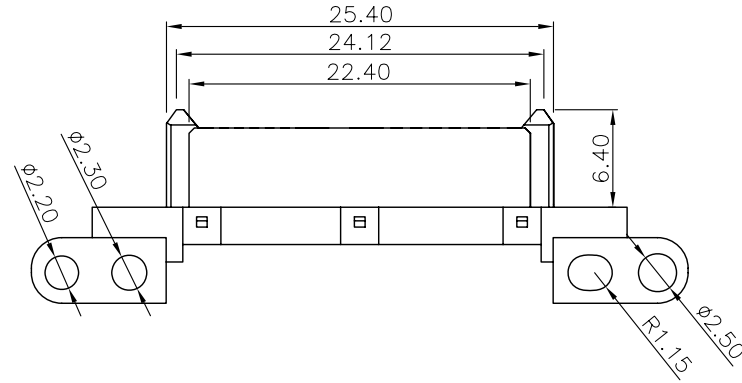

SCETION A-A

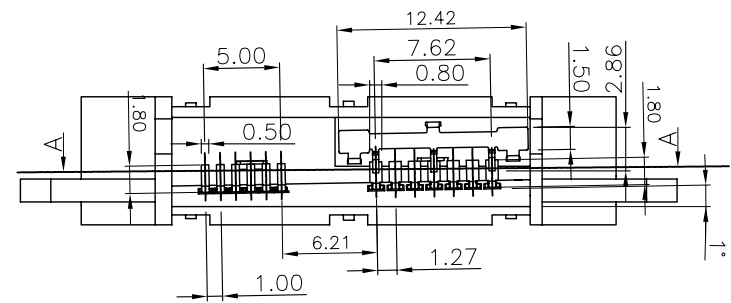

△	WITHOUT	15μ"	09-0120-04-H
	WITH	10μ"	09-0120-02-H
	WITHOUT	G/F	09-0120-01
	LOGO	MIN. GOLD THICKNESS	PART NUMBER

TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.2 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3'	DWN PING_HE 02SEP2011 CHK CIYONG_JIANG 02SEP2011 APVD WEI_ZHANG 02SEP2011 PRODUCT SPEC	Zhongxiang Electron Science CO.,LTD	
MATERIAL SEE NOTE	APPLICATION SPEC	NAME SATA 7+6P REC. V/T Solderless Type	
FINISH SEE NOTE	WEIGHT	SIZE A3	DRAWING NO C-09-0120
PROJECTION	DIMENSIONS: MM	CUSTOMER DRAWING	RESTRICTED TO -
		SCALE -	SHEET 1 OF 1
			REV. C1