
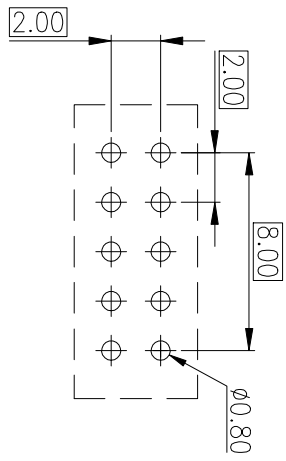

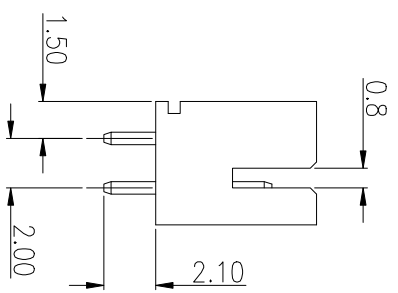
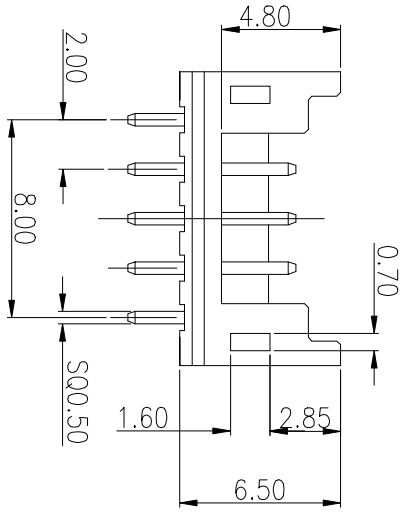


REV	DESCRIPTION	DATE	DWN	AP/D
A	RELEASED	15JUL10	MD	DZ
A1	更改新图框	10MAY2011	BH	

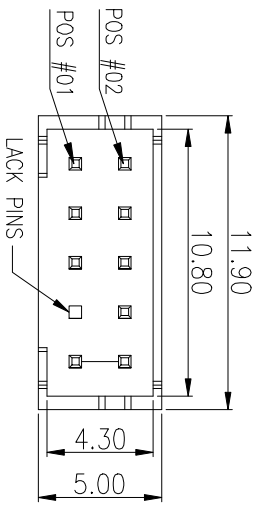

RECOMMEND P.C.B LAYOUT
PCB TOLERANCE: ± 0.05

NOTE:
1. MATERIAL:
HOUSING: NY46 UL 94V-0 COLOR: (SEE TABLE)
POSTS: BRASS
2. FINISH: GOLD FLASH OVER 50 μ MIN. NICKEL PLATED.
3. ELECTRICAL:
POSTS RESISTANCE: 40 MEGOHMS MAX.
INSULATION RESISTANCE: 1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING: 500V AC.
CURRENT RATING: 2.5A MAX.
VOLTAGE RATING: 500V AC/DC MAX.

4. ENVIRONMENTAL:
OPERATING TEMPERATURE: -40° TO +85°C.

SIZE	DRAWING NO	RESTRICTED TO
2*5	C-11-0009	
POLES	NEW PRAT NO.	HOUSING LACK PINS
		COLOR

Zhongxiang Electron Science CO.,LTD

2.00 WAFER CONNECTOR

TOLERANCES UNLESS OTHERWISE SPECIFIED:		10MAY2011	
0 P/C	$\pm .3$	CK	Bourne_Hu
1 P/C	± 0.3	CHK	Govin_Chen
2 P/C	± 0.2	AP/D	10MAY2011
3 P/C	± 0.15	AP/D	10MAY2011
4 P/C	$\pm .3$	AP/D	10MAY2011
MATERIAL SEE NOTE		PRODUCT SPEC	
FINISH SEE NOTE		APPLICATION SPEC	
PROJECTION SEE NOTE		WEIGHT	
DIMENSIONS:		MM	
NAME		2.00 WAFER CONNECTOR	
SIZE		DRAWING NO	
A3		C-11-0009	
CUSTOMER DRAWING		SCALE	
		1 OF 1	
SHEET		REV	
1		A1	

A 8 7 6 5 4 3 2 1