
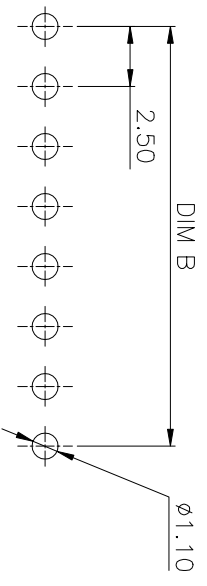
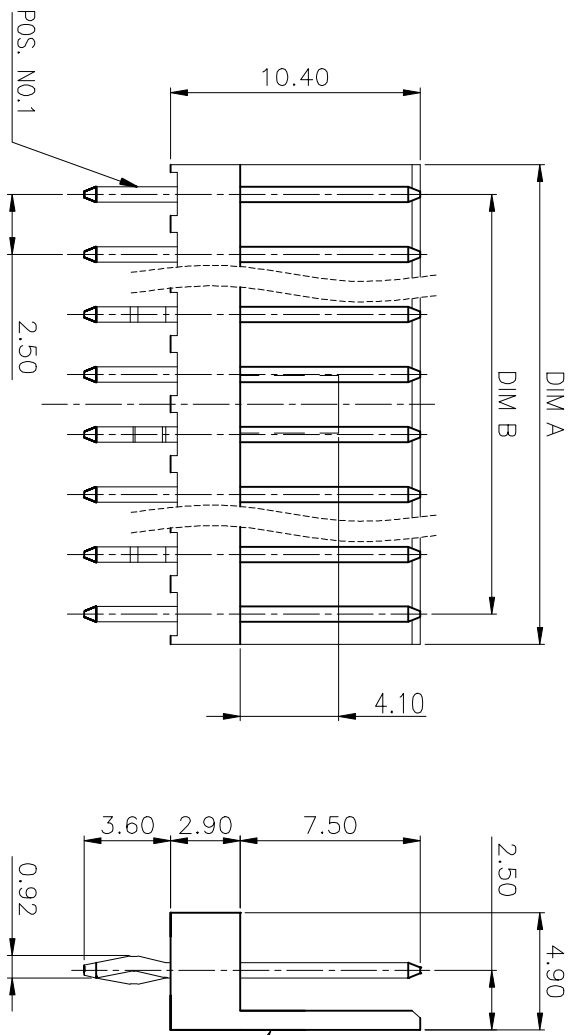
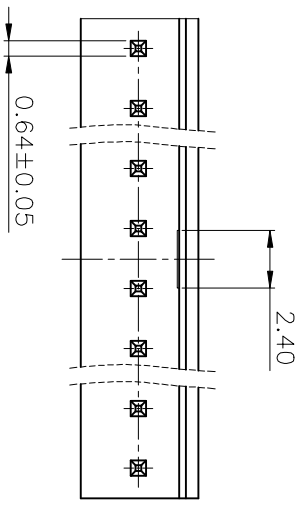


REV	DESCRIPTION	DATE	DWN	AP/D
A	RELEASED	19NOV09	MD	JY
B1		29DEC10	BB	DZ

NOTES:


- MATERIALS  
INSULATOR: (SEE TABLE) WITH 30% GF:(UL 94V-0); (SEE TABLE) COLOR, CONTACT: BRASS
- PLATING:  
CONTACT: 100u" MIN. MATTE-TIN PLATED IN CONTACT AREA, 50u" MIN. NICKEL UNDERPLATED ALL OVER.
- ELECTRICAL  
VOLTAGE RATING: AC 500V (R.M.S.)  
CURRENT RATING: 2.5 AMP  
INSULATION RESISTANCE: 1000 MEGOHMS MIN  
DIELECTRIC WITHSTANDING VOLTAGE: AC 500V (R.M.S.)  
CONTACT RESISTANCE: 40 MILLIOHMS
- ENVIRONMENTAL  
TEMPERATURE RANGE: -40°C TO +85°C




**RECOMMEND P.C.B LAYOUT  
(TOP VIEW)**

**LOGO AREA**

**LOGO TYPE:**



WITHOUT	WHITE	① ① ①	3 <sup>#</sup> 5 <sup>#</sup> 7 <sup>#</sup>	PA6T	20	17.5	8	11-0021-02
WITH	WHITE	① ① ①	1 <sup>#</sup> 2 <sup>#</sup> 3 <sup>#</sup>	PA6T	7.50	5.00	3	11-0021-01
LOGO	COLOR	KINK DIRECTION	KINK POSIS	MATERIAL	DIM A	DIM B	PIN NO.	PART NUMBER

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DIM		NAME	
0 PLG	±	BO	BO	<b>Zhongxiang Electron Science CO.,LTD</b>	
1 PLG	± 0.3	OK	BO	2.50 W/F STRAIGHT TYPE	
2 PLG	± 0.2	AP/D	Chen	DRAWING NO	
3 PLG	± 0.15	AP/D	David Zhang	C-11-0021	
4 PLG	± 0.3	PRODUCT SPEC	David Zhang	CUSTOMER DRAWING	
ANGLES	± 3°	APPLICATION SPEC	JS-GC03142-A1	SCALE 1:1	
MATERIAL	SEE NOTE	WEIGHT	PIN_01-(1A)	SHEET 1 of 1	
FINISH	SEE NOTE	DIMENSIONS:	mm	REV B1	
PROJECTION		RESTRICTED TO			

8 7 6 5 4 3 2 1