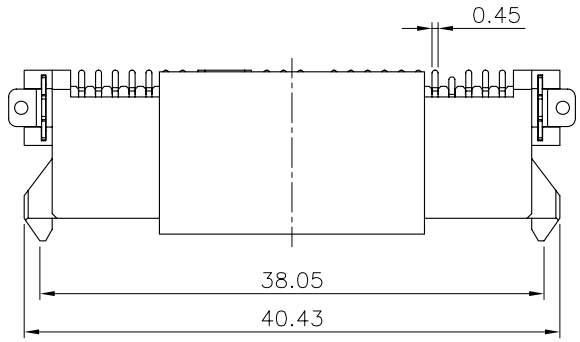

NOTES:
1.MATERIAL:
HOUSING: LCP 30% G/F UL94 V-0, COLOR: BLACK
CONTACT: PHOSPHOR BRONZE C5191H T=0.25mm
PEG: BRASS C2680H T=0.30mm

2.FINISH:
CONTACT:GOLD FALSH/TIN PLATING ON CONTACT AREA
100u" MIN.TIN PLATING ON SOLDERTAILS
50u" MIN.NICKEL UNDERPLATING OVER ALL
PEG:100u"MIN.TIN PLATION ON SOLDERTAILS
50u"MIN.TIN NICKEL UNDERPLATING OVER ALL

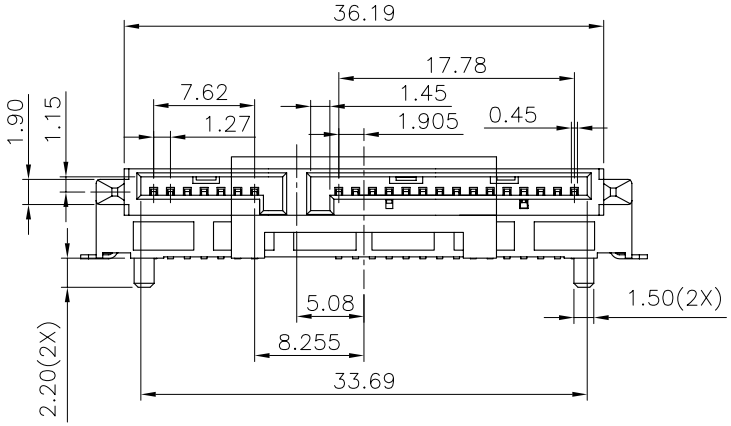



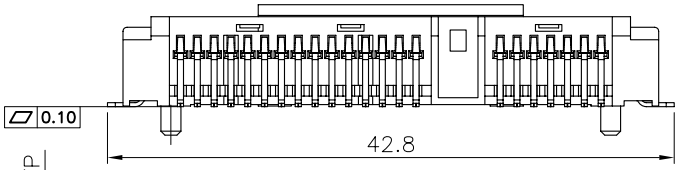

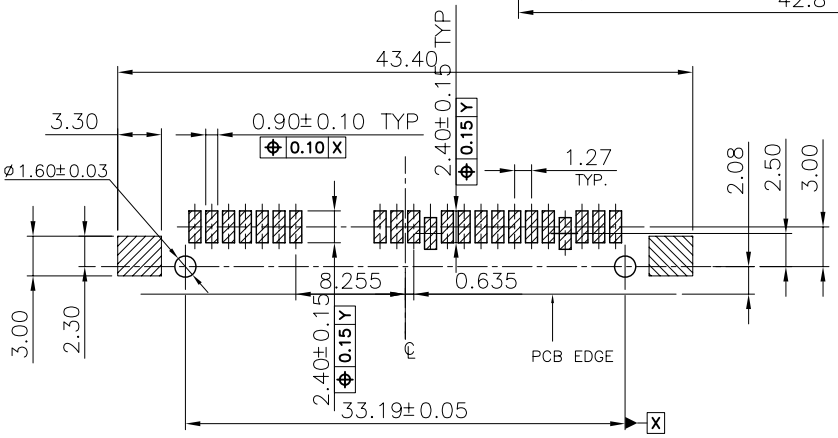

RECOMMEND P.C.B LAYOUT (T=1.2)

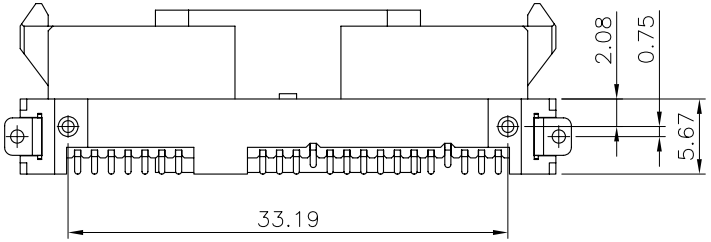

TABLE:

0.762μm [30μ"]	09-0098-03
0.381μm [15μ"]	09-0098-02
GOLD FLASH	09-0098-01
MIN. GOLD THICKNESS	PART NUMBER

ECN(DCN) NO.	REV.	DATE	DESCRIPTION	CHANGE	APVD
	A	17Sep13	RELEASED	KUANG	D.Z

TOLERANCES UNLESS OTHERWISE SPECIFIED
X. ±0.30 X.° ±2°
.X ±0.25 X.X° ±1°
.XX ±0.20
.XXX ±0.10

JS HAOGUO(Zhongxiang) Limited Company

DWN	JUANPING_KUANG	Customers Drawing	TITEL: SATA 7+15P F板下SMT 塑高6.74mm带接地片
CHKD	CIYONG_JIANG	Part NO.	SEE TABLE
APVD	DAVID_ZHONG	Drawing No.	C-09-0098
UNIT	mm	SIZE	A4
Scale	4 : 1	Sheet	1 of 1

Third Angle Projection